

NEOCEMENT®

DUVARDAN ZEMİNE
BETON GÖRÜNÜMLÜ
KADI AMAL AD



COLORTEK®



200/127-Powder



200/127-Powder
+ Metallo R Silver (NT+2 / Kg)



200/128-Screed



200/128-Screed
+ Metallo R Silver (NT+2 / Kg)



200/129-Pencil



200/129-Pencil
+ Metallo R Silver (NT+2 / Kg)

ENG

Neocement®

Neocement® is a tri-component decorative polished cement finish that is trowel applied, suitable for application over a multitude of architectural surfaces mainly walls and floors. Neocement® can also be colored and designs can be incorporated to achieve completely customizable and unique effects thus providing interior designers with a wide array of bespoke and modern finishes options.

Technical Name

Polished cement.

Key Properties

- High strength with impact and abrasion resistance
- Antistatic and fire resistance
- Moisture vapor permeable and excellent water resistance
- Flexible flooring
- Low VOC Technology
- Seamless flooring option
- Wide range of colors, textures and patterns
- Extends life-cycle appearance of concrete
- 3 Hours working life

Pack Size

- 14 kg paste + 8.3 kg Filler + 2.8 kg Resin
- 2.33kg paste + 1.38kg Filler + 0.47kg Resin

Recommended Uses

Neocement® is suitable for Interior and exterior on horizontal and vertical surfaces.

Type of Substrate

Neocement® can be applied on a multitude of surfaces such as concrete, wood, metal, marble, granite, ceramic tiles and even glass.

Finish

Mid sheen polished finish.

Coverage

Approximately 1 m²/kg depending on application technique.

Drying Time

Open to light traffic after 24 hours. Full cure in 72 hours depending on weather conditions and ambient temperature.

Thinner

No thinning required.

Preparation

All surfaces to be painted should be repaired, clean, dry and free from loose and flaking material. Then the surfaces should be sanded smooth, dusted clean and primed with a suitable COLORTEK® primer.

Instructions

- Apply SX0 PrimeWell or SX9 HmiGuard to consolidate the surface. On ceramic apply a coat of Neogrip.
- Apply Neofiller Base Coat (two coats). Once the second coat has dried, sand the surface with a 60 grid and remove the dust.

CODING SYSTEM

Color reference	Color name
200/128-Screed + Metallo R Silver (NT +2 / Kg)	
Metallic finish /	



- Apply first Neocement Coat; (Mix all 3 components until obtaining a relatively pasty mortar with good sag resistance).
- Once the coat has dried, apply second Neocement coat.
- Once the second coat has dried, sand the surface with a 150 or 220 grid and remove the dust.
- Apply the desired protective topcoat depending on intended use of the surface and location.
- When applying on ceramic tiles, it is important to remove or block the joint tiles with COLORTEK® SX2.

Note: Use a stainless steel trowel for a marble like polished cement finish or a sponge-covered trowel to obtain a Venetian rustic effect.

Cleaning

Remove as much product as possible from application equipment before cleaning. Clean equipment immediately after use with warm soapy water and rinse thoroughly. **Do not empty product into drains or watercourses.**

Additional Info

Product batches are tested using a quality control system and are ISO 9001:2008 certified.



Transportation & Storage

Care should be taken to avoid spillage. Protect from frost and humidity.

Neocement®

Neocement® çoğunlukla duvar ve zemin olmak üzere çok sayıda mimari yüzeyde uygulamak için uygun, üç bileşenli, mala ile uygulanan dekoratif çimento bazlı parlak bir kaplamadır. Neocement® renklendirilebilir ve tamamen kişiselleştirilebilir ve benzersiz etkiler elde etmek için tasarımlarla uygulanabilir, böylece iç tasarımcılara kişiye özel ve modern kaplama seçenekleri sağlar.

Teknik Adı

Parlatılmış çimento.

Temel Özellikler

- Darbe ve aşınma direnci sayesinde yüksek dayanıklılık
- Antistatik ve yangına dayanıklılık
- Nem buharı geçirirli, ve suya karşı üstün dayanıklılık
- Esnek döşeme
- Düşük VOC içeriği
- Pürüzsüz kaplama imkanı
- Geniş renk, doku ve desen
- Betonun kullanım ömrü görünümünü iyileştirir
- 3 saat kullanım öncesi maksimum bekleme süresi

Paket Boyutu

- 14kg macun + 8.3 kg Dolgu Macun + 2.8 kg Reçine
- 2.33kg macun + +1.38kg Dolgu Macun + 0.47kg Reçine



Tavsiye Edilen Kullanım

Neocement® iç ve dış mekânda dikey ve yatay yüzeylerde uygulanabilir.

Yüzey Tipleri

Neocement®, beton, ahşap, metal, mermer, granit, seramik ve hatta cam gibi birçok yüzeye uygulanabilir.

Görünüm

Orta parlaklıkta, cilalı.

Örtme

Uygulama tekniğine bağlı olarak yaklaşık 1 m2/kg.

Kuruma Süresi

Hafif kullanıma açılması için 24 saat. Hava şartlarına ve ortam sıcaklığına bağlı olarak 72 saatte tam kurlenme.

İnceltici

İnceltici gerekmez

Hazırlık

Boyánacak tüm yüzeyler temiz, kuru olmalı ve dağınık, soyulmuş kalıntı bulunmamalıdır. Ardından, yüzeyler zımparalanmalı, güzelce tozu alınmalı ve uygun bir COLORTEK® astarıyla ile astarlanmalıdır.

Talimatlar

- Yüzeyi sağlamlaştırmak için SXO PrimeWell veya SX9 HmiGuard uygulayın. Seramik yüzeylerde bir kat Neogrip kullanın.
- Neofiller Base Coat (iki kat) uygulayın. İkinci kat kuruduktan sonra, yüzeyi 60 kum zımparayla zımparalayın ve tozu alın.
- İlk Neocement Coat katını uygulayın (İyi sarkma direncine sahip nispeten hamur gibi bir harç elde edene kadar her 3 bileşeni de karıştırın).
- Kat kuruduktan sonra ikinci Neocement katını uygulayın.
- İkinci kat kuruduktan sonra, yüzeyi 150 veya 220 kum zımparayla zımparalayın ve tozu alın.
- Arzu edilen koruyucu üst tabakayı, yüzeyin ve yerin kullanıma amacına göre uygulayın.
- Seramik karolara uygulanırken derzler COLORTEK® SX2 ile sökülmesi veya tıkanmalıdır.

Not: Mermer görünümlü parlak bir beton görünümü elde etmek için bir paslanmaz çelik bir mala veya Venetian rustic görünümü elde etmek için sünger kaplı bir mala kullanın.

Temizlik

Temizlemekten önce, ürünü uygulama ekipmanından mümkün olduğunca çıkarın Ekipmanı kullandıktan hemen sonra ılık sabunlu suyla temizleyin ve iyice durulayın. Ürünü kanalizasyona veya su kanallarına boşaltmayın.

Ek Bilgi

Ürün partileri kalite kontrol sistemi kullanılarak test edilmiştir ve ürünler ISO9001:20009 sertifikalıdır.

Taşıma & Saklama

Dökülmemesine dikkat edilmelidir. Donmaya ve neme karşı koruyun.



www.colortek.eu
info@colortek.eu



Synergy, Added Value, Continuous Improvement,
Diversity, Integrity, Social Responsibility.





200/00-Castle White



200/103-Vapor



200/106-Canvas



200/106-Canvas
+ Metallo R Silver (NT+2 / Kg)



200/109-Paper



200/112-Urban



200/101-Neutral



200/104-Cloud



200/107-Dust



200/107-Dust
+ Metallo R Silver (NT+2 / Kg)



200/110-Attic



200/113-Slab



200/102-Raw



200/105-Stone



200/108-Terre



200/108-Terre
+ Metallo R Silver (NT+2 / Kg)



200/111-Depth



200/114-Refined



200/115-Steam



200/115-Steam
+ Metallo R Silver (NT+2 / Kg)



200/118-Ashes



200/121-Loft



200/124-Horizon



200/124-Horizon
+ Metallo R Silver (NT+2 / Kg)



200/116-Sidewalk




200/116-Sidewalk
+ Metallo R Silver (NT+2 / Kg)



200/119-Cast



200/122-Fusion

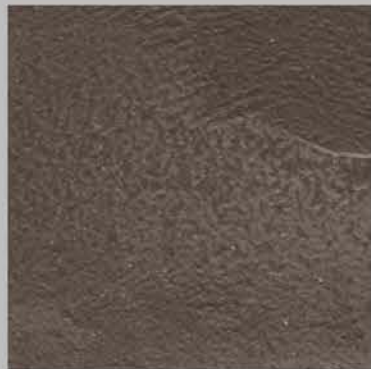

200/125-Cork



200/125-Cork
+ Metallo R Silver (NT+2 / Kg)



200/117-Wetcement



200/117-Wetcement
+ Metallo R Silver (NT+2 / Kg)




200/120-Element



200/123-Slate



200/126-Onyx

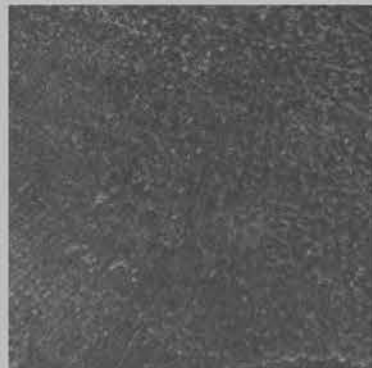

200/12-Onyx
+ Metallo R Silver (NT+2 / Kg)